




EShare

4K Wireless Presentation Button

ES06T-C

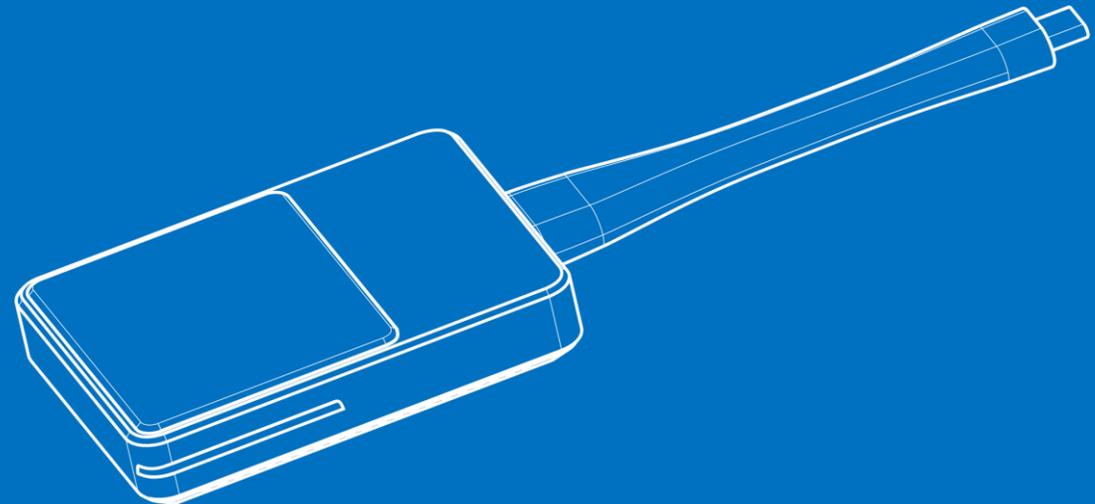

Efficient Collaboration Like Never Before

Plug and play, one-click casting, wireless virtualization of audio and video equipment



EShare ES06T-C

EShare ES06T-C does not require any software or drivers to be installed, just a single button to start screen casting wirelessly. Reducing downtime and uncomfortable silences for users to kick off productive wireless presentations and audio/video conferences.

The audio and video conference equipment (cameras, microphone arrays, speakers, displays, etc.) can be virtualized to any laptop wirelessly in real-time.

- **No software and no driver needed.**
- **No more complicated and lengthy cables in the meeting room.**
- **Easy to use.**
- **4K Ultra-High resolution.**
- **Wireless virtualization of audio and video conference equipment.**
- **Touch feedback support for Win/macOS/Chrome/Linux/iPad/Android.**

* Full featured Type-C port is required.



4K Ultra HD Wireless Screen Sharing

Unparalleled fineness, clearer and natural picture



BYOM (Bring Your Own Meeting)

Through the latest A/V Virtualization feature of EShare, users can efficiently use the A/V equipment on the large display. EShare button will wirelessly virtualize the camera, microphone, speakers and display of the IFPD to user's laptop to start an online meeting. It's compatible with Teams/Zoom/Google Meet/Skype/WebEx, etc.

Efficient

Use the audio and video equipment in the conference room wirelessly to start an online meeting on the laptop.

Easy to use

Driver-free, plug and play.



Enjoy Sharing Life

Efficient

EShare Button is a hardware solution, it only takes a few seconds to start the wireless presentation. Through a simple and intuitive way to improve the efficiency and agility of corporate meetings, participants can take turns to make presentations without waiting and wasting valuable time.

Easy to pair

Plug EShare button into a device (IFP/projector/...) that has been pre-installed with EShare to complete the pairing automatically.

No software and drivers needed

EShare Button does not require users to install any additional software and drivers, and it is compatible with any operating system. There is no potential entry risk that can be exploited by viruses and malicious software.

Trustworthy security protection mechanism

High-strength security encryption and WPA2 authentication to ensure security.



Enjoy Sharing Life

Reliable wireless connection

EShare preferentially selects 5G Wi-Fi channels to provide smooth and delay-free wireless streaming of ultra-high-definition 4K content.

High-performance


EShare uses a brand new hardware configuration and is deeply optimized to give full play to its best performance.

Touch feedback

The touch feedback feature allows users to touch control the laptop that is casting on the touch display, making the meeting more efficient.

Multiple screens

EShare supports multiple buttons to connect and use in turn or share the screen simultaneously. It also supports collaborative sharing with EShare APP.

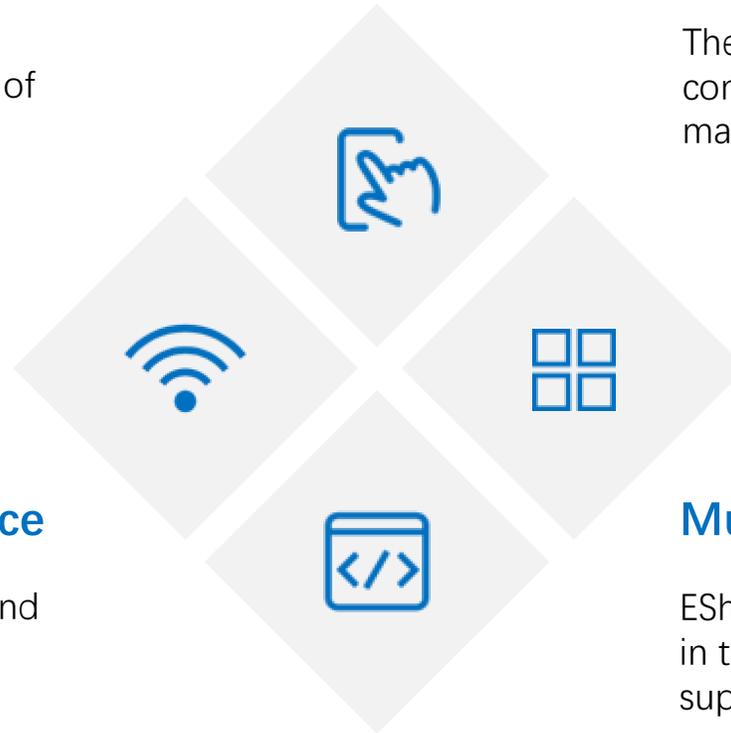

Extended Desktop



2-Way Video and Audio



5GHz Wi-Fi



No Software



True Plug & Play



Touch Feedback



EShare ES06T-C Product Spec.

Product Line	Wireless Presentation Button
Marketing Name	EShare 4K Button
Model Number	ES06T-C
WIFI	5GHz & 2.4GHz
Authentication Protocol	WPA2(WPA2-PSK (Pre-Shared key) / WPA2-Enterprise)
DDR	DDR3 512MB
A/V Virtualization	Wirelessly virtualize A/V equipment such as camera, microphone, speaker, and display to user's laptop
LED	Blue/Green/Red
Video Outputs	DP 1.2, eDP 1.4, comply with HDCP
Frame Rate	Up to 60 fps depending on environment (FHD) and 30fps for 4K
Output Resolution	720x480, 720x576, 1280x720, 1920x1080(1080P), 3840x2160
Input Source	480p, 576p, 720p, 1080p, 4K PC timing: 640x480, 800x600, 1024x768, 1280x720, 1920x1080, 3840x2160
Mouse cursor control back	Yes
Touch control back	Support 10 points
OS Support	Windows® 7, Windows 8.1, Windows 10 or Windows 11. macOS™, Chrome OS, Linux OS, Android OS. Any OS supports full featured Type-C
Type-C Interface	Full featured Type-C
Input Voltage	5V (Type-C power supply)
Current Consumption	0.9A max
Power Consumption	2.5W average
Operating Temperature	-0°C ~ 40°C (14°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-40°F ~ 140°F)
Dimensions	176mm x 58mm x 17mm
Net Weight	80g